

Features

- Durable, 40 column impact dot matrix printer uses 3¼" wide paper
- Large 5" diameter paper roll for longer play time, 3¼" or 4" diameter also available
- Two-ply paper roll for both receipt and journal copy, or single-ply for receipt only
- Autocutter cuts the receipt paper only, the journal copy remains uncut and intact
- Take-up handler for the journal copy
- Easy to load paper and cartridge ribbon
- Open design for easy paper loading and quick ribbon replacement
- High performance graphics for logos, barcodes and promotional messages
- 120/240 VAC switch selectable – Model 4700
- 24 VDC – Model 4800
- Serial or parallel interface
- Printer setup stored in EEPROM – rocker switch selectable
- Printer drivers available for Windows NT, 95/98, 2000


Options

- 44, 52, 60 or 66 columns
- Interface cables
- Paper out switch
- Custom programmable EPROM
- Time and date calendar

Kiosk/Gaming Printer

Model 4700 & 4800

LARGE PAPER ROLL FOR LONGER PLAY TIME

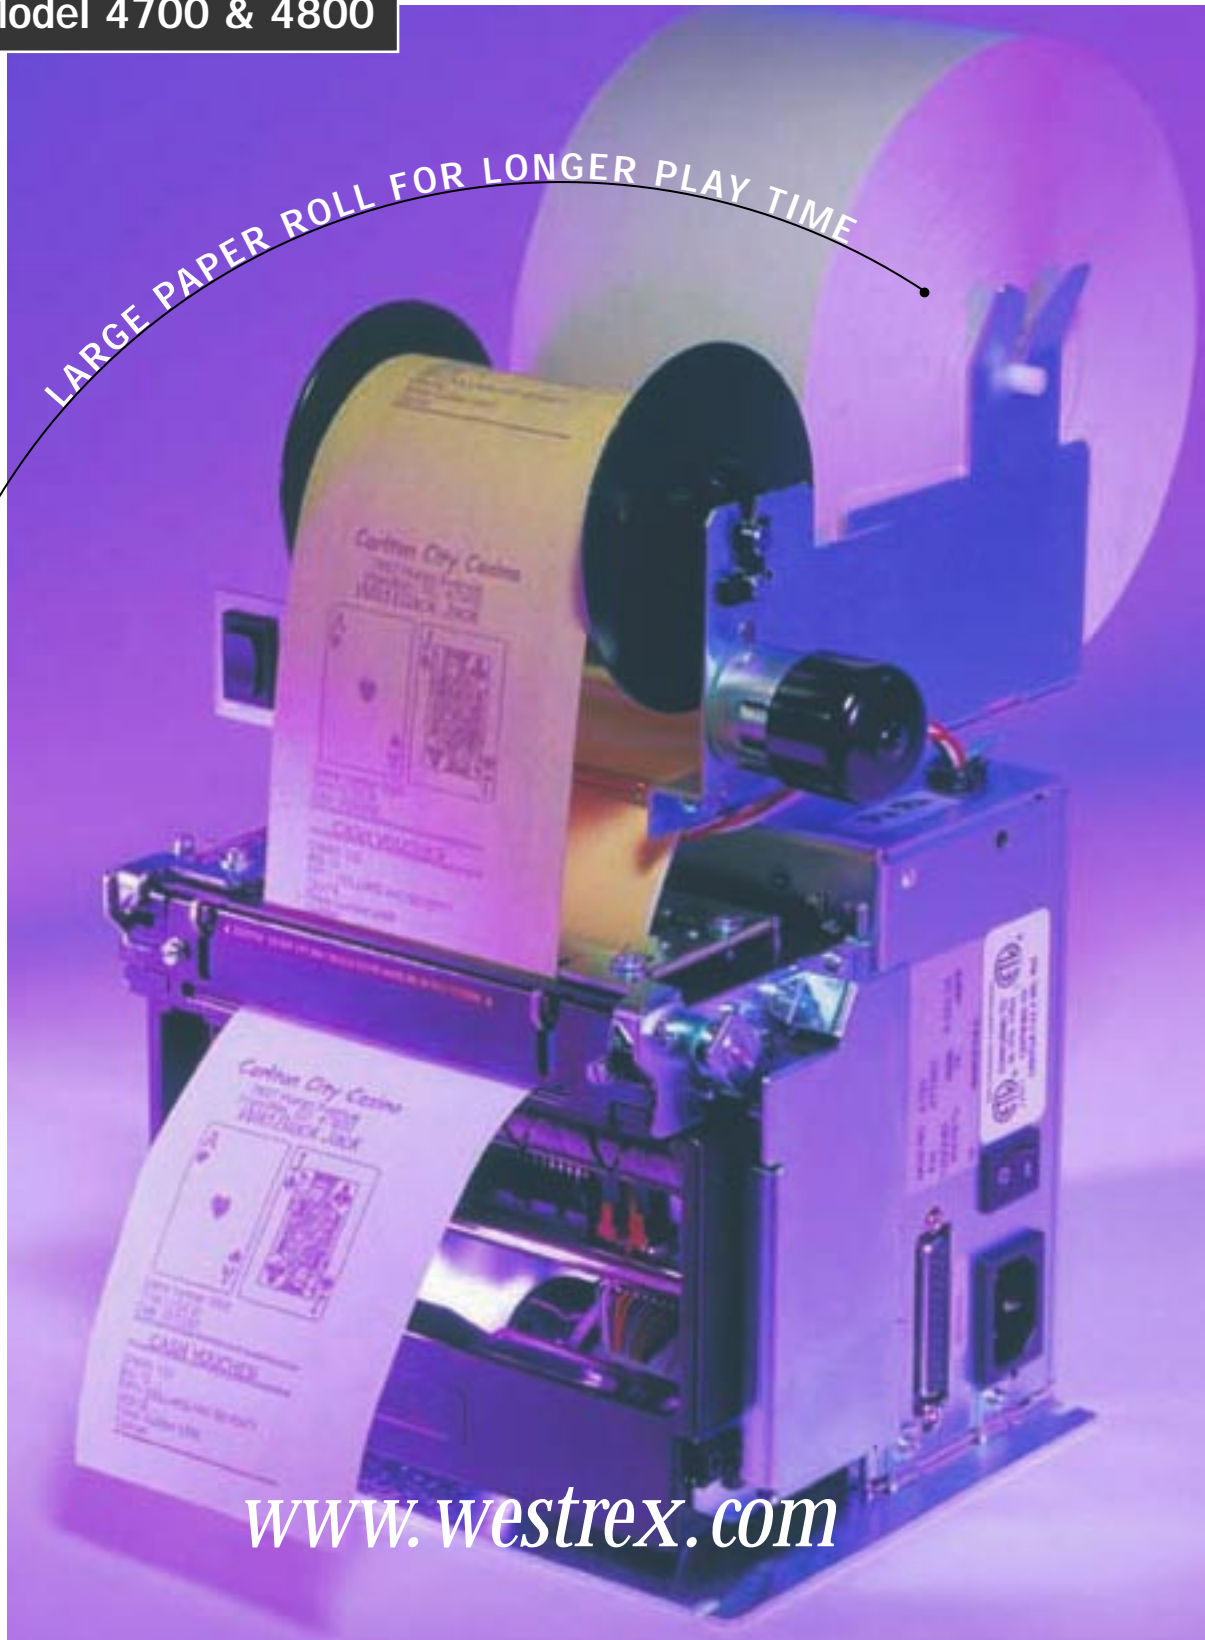

www.westrex.com

4700/4800 Specifications

Printing Characteristics

Speed	• Up to 3.4 lines/second
Method	• Bidirectional
Type	• 9-needle impact dot matrix
Paper feed	• Friction roller
Number of columns	• 40 standard; optional 44, 52, 60, 66
Characters/inch	• 12 standard (6 elongated)
Line spacing	• 8 lines/inch
Character set	• Full 96 character ASCII
Selectable bar codes	• UPC-A, Interleaved 2 of 5, Code 39, Code 128
Buffer	• 6K standard

Interfaces

Serial	• RS-232; DB-25F connector
Baud rate	• 110, 150, 300, 600, 1200, 2400, 4800, 9600
Parallel	• Centronics compatible; DB-25F connector

Electronics

Programming	• EPROM
Setup	• EEPROM
Sensors	• Paper low Paper out optional

Physical Characteristics

Dimensions w/ 4"D paper attached (W x D x H)	• 190.5mm x 218.7mm x 274.6mm (7.5" x 8.6" x 10.81")
Dimensions w/ 5"D paper attached (W x D x H)	• 190.5mm x 218.7mm x 300.5mm (7.5" x 8.6" x 11.83")
Weight	• 4.7 kg (10.4 lbs. with 5"D paper)

Environmental

Temperature	• 0°C to 40°C (32°F to 104°F) operating -20°C to 60°C (-4°F to 140°F) storage
Relative humidity (non-condensing)	• 20% to 80% operating 5% to 95% storage

Power Requirements

4700 input voltage	• 120/240VAC switch selectable
Frequency	• 50/60 Hz
Power	• 56 watts
4800 input voltage	• 24 VDC (3 Amps peak)

Paper

Type	• Single or two-ply roll
Roll diameter	• 3¼", 4" or 5"
Roll width	• 3¼"

Ribbon

Type	• Continuous cartridge, purple or black
------	---

Reliability

Mechanism life	• 10 million lines
Printhead life	• 200 million characters
Autocutter	• 1 million cuts (paper dependent)
Ribbon life	• 6 million characters – purple 4 million characters – black

Certifications

- UL
- FCC

Printer Drivers

Operating systems	• Windows NT, 95/98, 2000 Consult Westrex for additional drivers
-------------------	---