

Features


- Durable, 40 column impact dot matrix printer uses 65mm wide paper
- Large 5" diameter paper roll for longer play time, 3¼" or 4" diameter also available
- Two-ply paper roll for both receipt and journal copy, or single-ply for receipt only
- Autocutter cuts the receipt paper only, the journal copy remains uncut and intact
- Take-up handler for the journal copy
- Open design for easy paper loading and quick ribbon replacement
- High performance graphics for logos, barcodes and promotional messages
- 120/240 VAC switch selectable – Model 4700
- 24 VDC – Model 4800
- Serial or parallel interface
- Printer setup stored in EEPROM – user selectable
- Printer drivers available for Windows NT, 95/98, XP, 2000

Options

- Interface cables
- Paper low and paper out sensors
- Custom programmable EPROM
- Paper presenter

Model 4700 & 4800

Cashless Gaming Ticket Printer

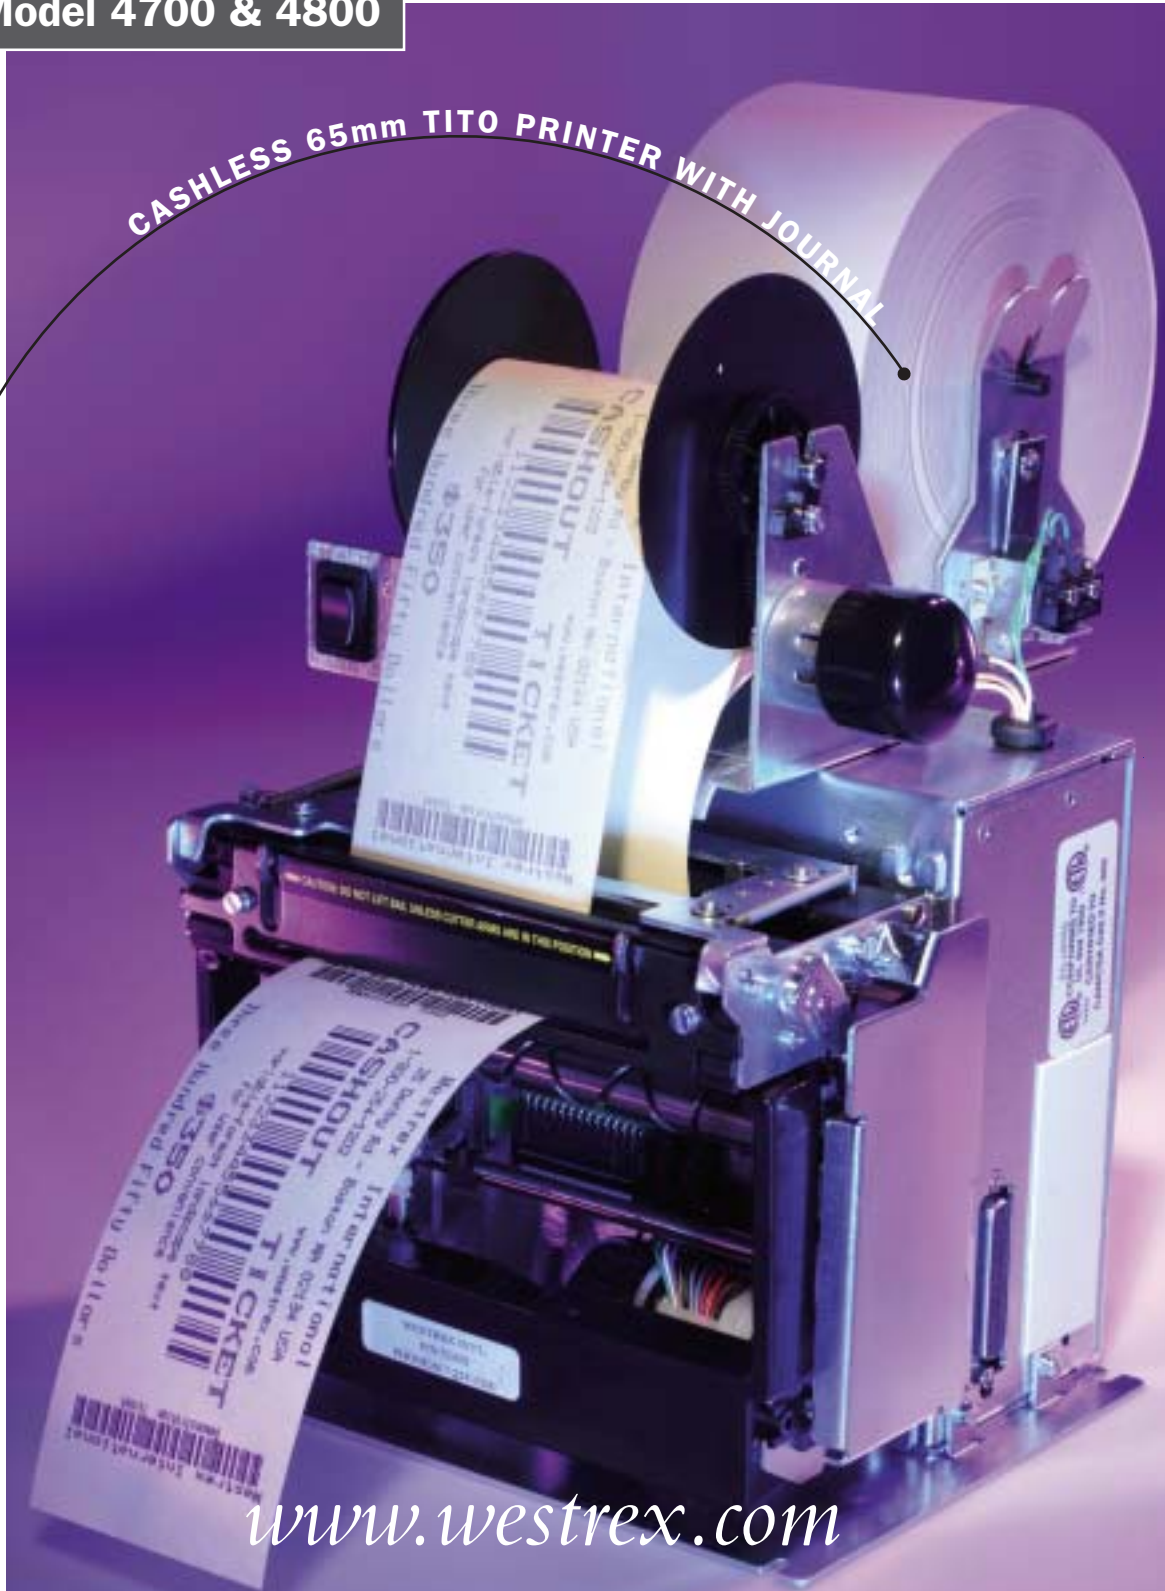

Specifications

Printing Characteristics

- | | |
|-------------------|--|
| Speed | • Up to 3.4 lines/second (up to 277 cps) |
| Method | • Bidirectional |
| Type | • 9-needle impact dot matrix |
| Paper feed | • Friction roller |
| Number of columns | • 45 standard |
| Characters/inch | • 12 standard (6 elongated) |
| Line spacing | • 8 lines/inch |
| Character set | • Full 96 character ASCII |
| Bar code | • Interleaved 2 of 5 |
| Buffer | • 5K standard |

Interfaces

- | | |
|-----------|--|
| Serial | • RS-232; DB-25F connector |
| Baud rate | • 110, 150, 300, 600, 1200, 2400, 4800, 9600 |
| Parallel | • Centronics compatible; DB-25F connector |

Electronics

- | | |
|-------------|-------------------------------------|
| Programming | • EPROM |
| Setup | • EEPROM |
| Sensors | • Paper low
• Paper out optional |

Physical Characteristics

- | | |
|---------------------------------------|--|
| Dimensions with 5"D paper (W x D x H) | • 182.1mm x 234.0mm x 285.8mm (7.17" x 9.25" x 11.25") |
| Weight | • 9.9 lbs. with 5"D paper |
| Dimensions with 4"D paper (W x D x H) | • 182.1mm x 222.3mm x 279.4mm (7.17" x 8.75" x 11.00") |
| Weight | • 9.4 lbs. with 4"D paper |

Environmental

- | | |
|------------------------------------|--|
| Temperature | • 0°C to 40°C (32°F to 104°F) operating
• -20°C to 60°C (-4°F to 140°F) storage |
| Relative humidity (non-condensing) | • 20% to 80% operating
• 5% to 95% storage |

Power Requirements

- | | |
|--------------------|--------------------------------|
| 4700 input voltage | • 120/240VAC switch selectable |
| Frequency | • 50/60 Hz |
| Power | • 56 watts |
| 4800 input voltage | • 24 VDC (3 Amps peak) |

Paper

- | | |
|---------------|--------------------------|
| Type | • Single or two-ply roll |
| Roll diameter | • 5" |
| Roll width | • 65mm |

Ribbon

- | | |
|------|-------------------------------|
| Type | • Continuous cartridge, black |
|------|-------------------------------|

Reliability

- | | |
|----------------|--------------------------------|
| Mechanism life | • 10 million lines |
| Printhead life | • 150 million characters |
| Autocutter | • one million cuts |
| Ribbon life | • 6 million characters – black |

Certifications

- UL
- FCC

Printer Drivers

- | | |
|-------------------|---|
| Operating systems | • Windows NT, 95/98, XP, 2000
• Consult Westrex for additional drivers |
|-------------------|---|